

In-ceiling loudspeaker CL62


CL62

This ceiling loudspeaker, 6", two ways is a reference of quality in this range of products. CL62 renders speech and background music with great fidelity. It is discrete, for a perfect integration in interior design. It is repaintable, and the logo can be removed. CL62 has been designed to equip prestigious places.


- Music and speech
- 100V and 8 Ohms modes
- IP23
- In-ceiling or suspended




Directivity pattern

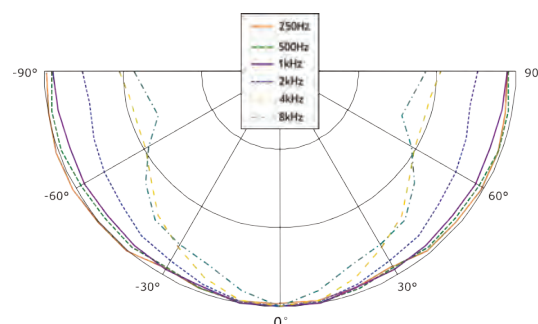

Frequency response on axis 1W/1m

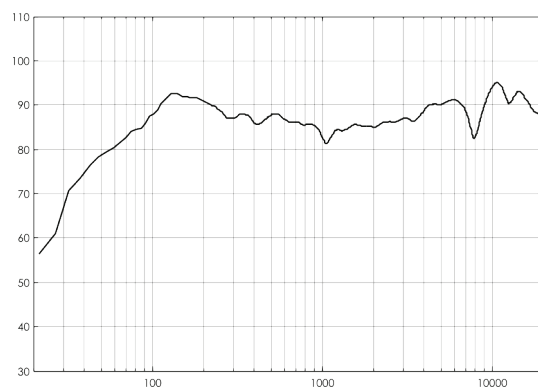

Impedance

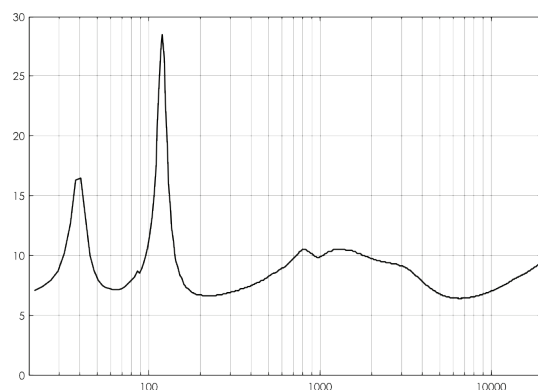

Technical data

Continuous power RMS	40W
Power taps 70V/100V	2,5W 5W 10W 20W / 5W 10W 20W 40W
Peak power	120W
Sensitivity	89dB / 1W / 1M
Frequency resp. (-3dB / -10dB)	85Hz - 20kHz / 50Hz - 20kHz
Impedance	8 Ohms
Coverage angle 1kHz/4kHz	180° / 80°
Directivity index 1kHz /4kHz	1,3 / 4,9
Woofer	165mm (6,5 In), fiber glass dome, rubber surround
Twitter	25mm (1 In), kapton dome. Coaxial and orientable
Crossover	3,5kHz 2nd order
Input	Push spring terminals
Visible diameter (mm)	280
Hole cutout diameter (mm)	248
Ceiling thickness (mm)	Min 9 / max 37
Backcan height (mm)	177,5
Weight(kg)	2,9
Color	White (RAL 9016)
Environment	IP23
Included accessories	Cut-out template, tools to remove and secure grille, adhesive logo

CL62 - Datasheet
In-ceiling loudspeaker



www.activeaudio.fr
info@activeaudio.fr

Tel +33 (0)2 40 46 66 64